




# QLD Pipelines Vertigan Schematics

Version as June 2023

**apa**

# Wallumbilla Gladstone Pipeline

## Legend


DS	Delivery Stream
	Non-Scheme Pipeline section
	Single direction flow
	Bi-direction flow

### naming convention:

Connecting Facility  
(Delivery / Receipt point)

## Nameplate Capacity

Northern-haul (Ruby Jo Gas Plant to QCLNG LNG Plant)	1588 TJ/D
--	-----------

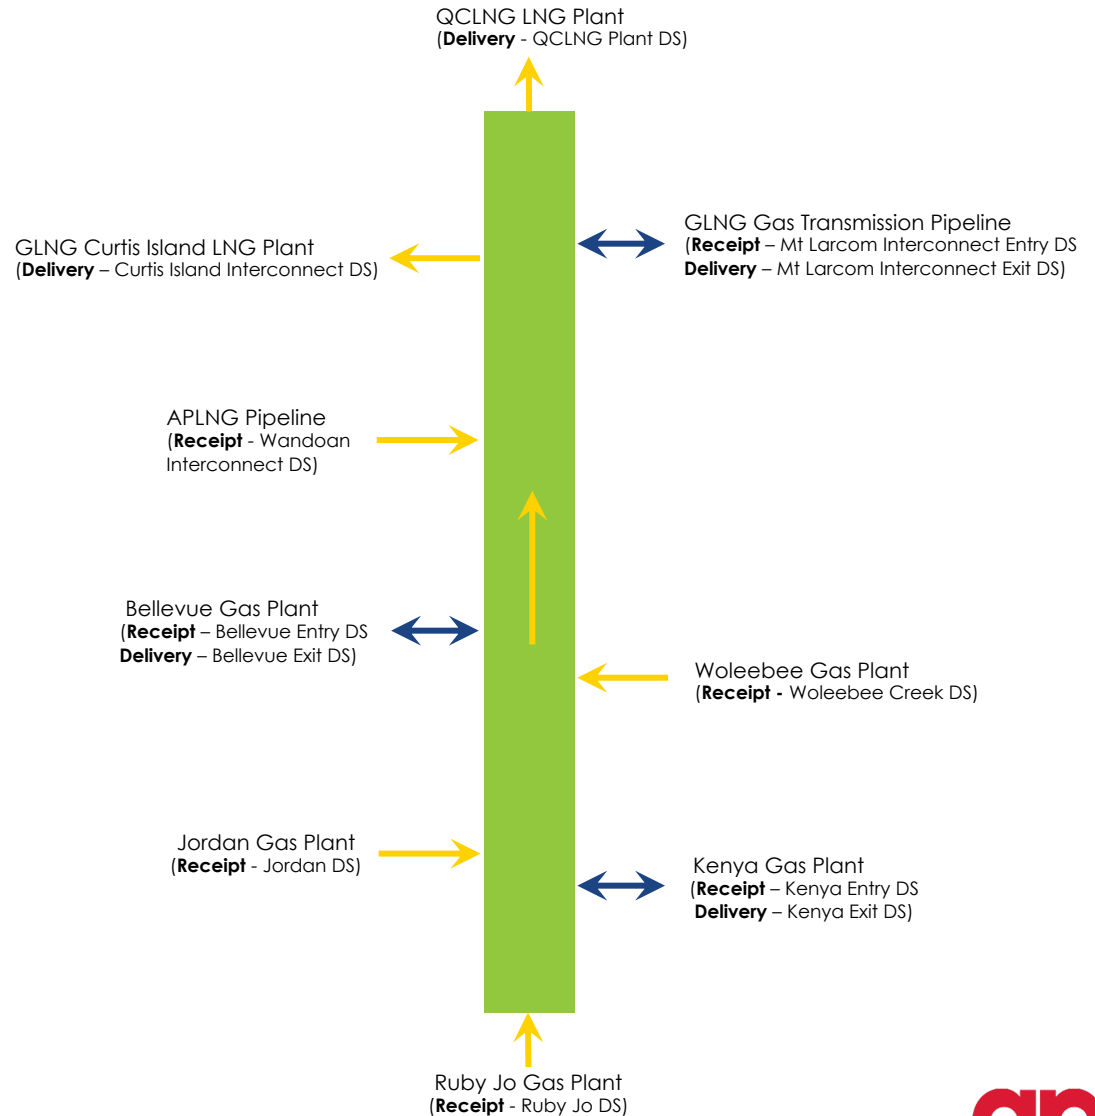

# Wallumbilla Gladstone Pipeline

Receipt Points		
Point	Value (kPa)	
<b>Min Pressures</b>	Kenya Receipt	5,500
	Ruby Jo Receipt	5,500
	Jordan Receipt	5,500
	Bellevue Receipt	5,500
	Woleebee Creek Receipt	5,500
	Wandoan Interconnect Receipt	5,500
	Mt Larcom Interconnect Receipt	5,500
<b>Max Pressures</b>	Kenya Receipt	9,870
	Ruby Jo Receipt	9,870
	Jordan Receipt	9,870
	Bellevue Receipt	9,870
	Woleebee Creek Receipt	9,870
	Wandoan Interconnect Receipt	9,810
	Mt Larcom Interconnect Receipt	10,080
Delivery Points		
Point	Value (kPa)	
<b>Min Pressures</b>	Kenya Delivery	5,500
	Bellevue Delivery	5,500
	Mt Larcom Interconnect Delivery	5,500
	Curtis Island Interconnect Delivery	5,500
	LNG Plant Delivery	5,500
<b>Max Pressures</b>	Kenya Delivery	9,870
	Bellevue Delivery	9,870
	Mt Larcom Interconnect Delivery	9,810
	Curtis Island Interconnect Delivery	10,130
	LNG Plant Delivery	10,200
Locational MDQs		
Point	Value (TJ/d)	
<b>Receipt Point MDQs</b>	Kenya Receipt	170
	Ruby Jo Receipt	465
	Jordan Receipt	465
	Bellevue Receipt	158.8
	Woleebee Creek Receipt	757
	Wandoan Interconnect Receipt	500
	Mt Larcom Interconnect Receipt	600
<b>Delivery Point MDQs</b>	Kenya Delivery	335
	Bellevue Delivery	276
	Mt Larcom Interconnect Delivery	600
	Curtis Island Interconnect Delivery	621
	LNG Plant Delivery	1,588

Point	Description
<b>Kenya Receipt</b>	Inlet flange to Kenya Lateral Pig Launcher Compound
<b>Ruby Jo Receipt</b>	Inlet flange to GCH South Pig Launcher Compound
<b>Jordan Receipt</b>	Inlet of Jordan Boundary Isolation Valve
<b>Bellevue Receipt</b>	Inlet of Boundary Isolation Valve
<b>Woleebee Creek Receipt</b>	Inlet flange to Woleebee Creek Pig Launcher Compound
<b>Wandoan Interconnect Receipt</b>	Inlet flange to Wandoan Pig Launcher
<b>Mt Larcom Interconnect Receipt</b>	Flange at Interconnect facility connection to 3 <sup>rd</sup> party
<b>Kenya Delivery</b>	Inlet flange to Kenya Lateral Pig Launcher Compound
<b>Bellevue Delivery</b>	Inlet of Boundary Isolation Valve
<b>Mt Larcom Interconnect Delivery</b>	Flange at Interconnect facility connection to 3 <sup>rd</sup> party
<b>Curtis Island Interconnect Delivery</b>	Flange at Interconnect facility connection to 3 <sup>rd</sup> party
<b>LNG Plant Delivery</b>	Inlet flange at Curtis Island LNG Plant